


# Interlogix Simon XT

## Wiring the MN01-4G Cellular Communicator and Programming the Panel

**CAUTION:** It is advised that an experienced alarm installer programs the panel as further programming may be required to ensure proper performance and use of the full functionality.  
**Do not route any wiring over circuit board.**  
**Full panel testing and signal confirmation must be completed by the installer.**

### Wiring the MN01-4G to the Alarm Panel

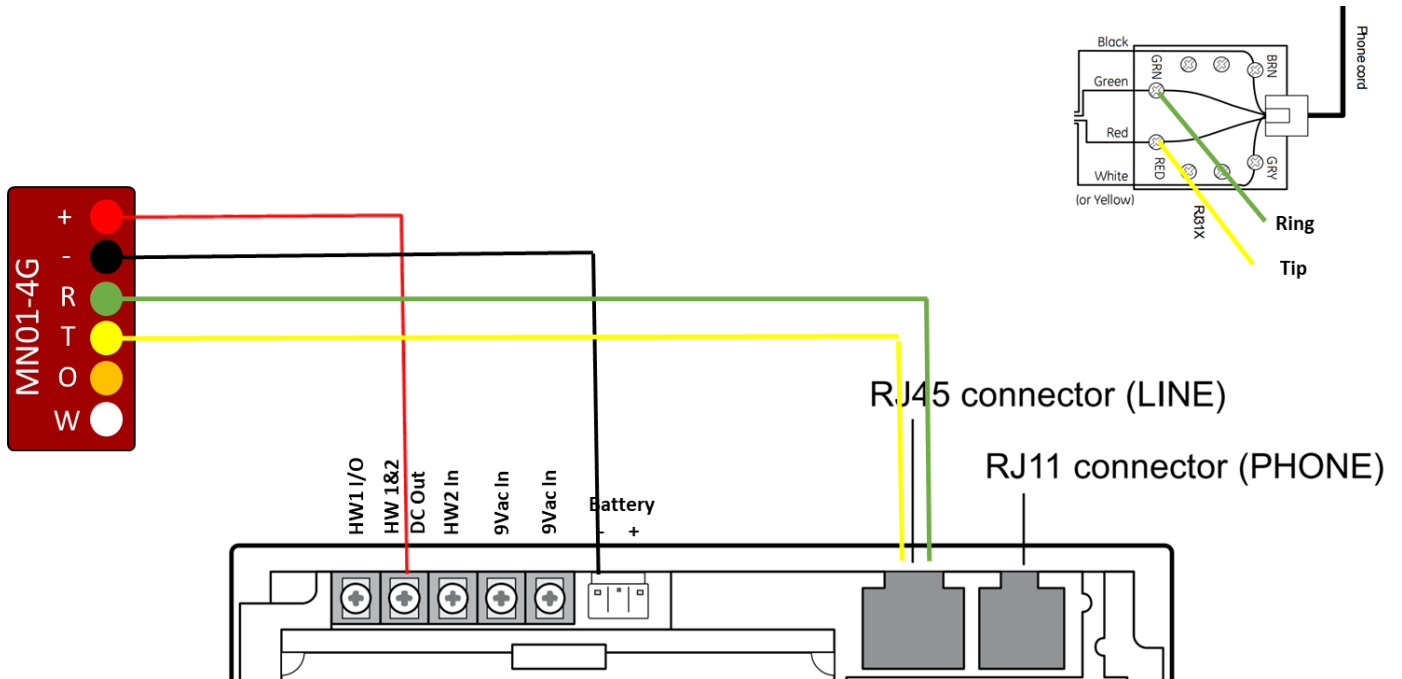

**NOTE:** The GE Simon XT does not have a Keyswitch and therefore doesn't support the remote ARM/DISARM interactive feature of our smartphone application. The white and orange wires of the MiNi01-4G are not used. The event reporting still works in the app and you will receive notifications on your smartphone.

# Programming the Interlogix Simon XT Alarm Panel via the Keypad

Enable Contact ID reporting:

Keypad Display	Keypad entry	Action description
Day, hour	▽▽▽	Press "Down" 3 times to go to "System Programming"
System Programming	OK	Press OK to "Enter Code"
Enter Code	4321, OK	4321 is the default installer code, "OK" to confirm
Access Codes	▽▽ OK	Press "Down" 2 times to go to "Phone #s", press OK to enter
Phone #1	OK, 123456, OK	"OK" to enter "Phone #1", 123456 (fictitious or actual number), OK to save
Phone #1	Status	Press "Status" to go back, press "Down" to go to "Phone Options"
Phone Options	OK,	Press "OK" to enter, Press "Down" 2 times to go to "DTMF Dial"
DTMF Dial	OK, OK	Press "OK" to enter, press "Down" to select "ON", press "OK" to save
DTMF Dial	Status,▽▽	Press "Status" to go back, press "Down" 2 times to go to "Reporting"
Reporting	OK, OK, OK	Press "OK" to go to "Opening Reports", "OK" to select, "OK" to edit
Opening Rpts.	▽ OK, ▽	Press "Down" until "ON" is selected, "OK" to save
Opening Rpts.	▽ OK	Press "Down" to go to "Closing Reports", press "OK" to edit
Closing Rpts.	▽ OK	Press "Down" until "ON" is selected, press "OK" to save
Closing Rpts.	Status, ▽, OK	Press "Status" to go back, "Down" to "Rpt. Comm. Modes", "OK" to enter
Ph.1 Rpt Mode	△△△ OK	Press 2 times "UP" to go to All CID, press "OK" to save
Ph.1 Rpt Mode	Status, Status	Press "Status" 2 times to go back to main menu
Reporting	△△△△△,OK	Press "UP" 4 times to go to "Security", press "OK" to enter
Account Nmbr.	OK, 1234, OK	Press "OK" to enter, 1234 (enter your account number) "OK" to save
Account Nmbr.	Status	Press "Status" 3 times until you exit the programming mode